



\*Note : Picture above is for illustration purpose only. Please contact your local dealer for more information.

# Internal Combustion Pneumatic Tire Lift Trucks

Capacity: 1.5 - 3.5 ton





# DP/GP(E)15N-35N Series

Our 1.5 - 3.5 ton capacity pneumatic tire lift trucks have an engineered design that deliver horsepower and performance that makes for exceptional productivity.

## UNRIVALLED POWER

Whether it's handing industrial materials or shipping products on a tight schedule, our internal combustion pneumatic tire lift trucks work long and hard to get the job done.

Every Cat® lift truck model in this series meets or exceeds stringent U.S. Environmental Protection Agency (EPA) standards for reducing carbon monoxide (CO), hydrocarbons (HC) and nitrogen oxide (NOx) emissions, while delivering the power needed for heavy-duty performance. Operator comfort features, including a full suspension seat, are standard. There are also many high performance packages available that can tailor a Cat lift truck to specific application requirements. From the manufacturing headquarters in Sagamiara, Japan, using ISO 14001 certified and independently audited quality control procedures, Cat lift trucks provide excellent long-term value and come with turnkey support from the industry's most trusted dealer network.



| Model        | Fuel Type    | Capacity (kg)<br>@ 500mm LC | Engine<br>Displacement (l)<br>Normal / Z engine |
|--------------|--------------|-----------------------------|-------------------------------------------------|
| DP15N        | Diesel       | 1500                        | 2.5                                             |
| GP(E)15(Z)N* | Gas / LP Gas | 1500                        | 1.5 / 2.1                                       |
| DP18N        | Diesel       | 1750                        | 2.5                                             |
| GP(E)18(Z)N* | Gas / LP Gas | 1750                        | 1.5 / 2.1                                       |
| DP20CN       | Diesel       | 2000                        | 2.5                                             |
| DP20N        | Diesel       | 2000                        | 3.3                                             |
| GP(E)20(Z)N  | Gas / LP Gas | 2000                        | 2.1 / 2.5                                       |
| GP(E)20CN    | Gas / LP Gas | 2000                        | 2.1                                             |
| DP25N        | Diesel       | 2500                        | 3.3                                             |
| GP(E)25(Z)N  | Gas / LP Gas | 2500                        | 2.1 / 2.5                                       |
| DP30N        | Diesel       | 3000                        | 3.3                                             |
| GP(E)30N     | Gas / LP Gas | 3000                        | 2.5                                             |
| DP35N        | Diesel       | 3500                        | 3.3                                             |
| GP(E)35N     | Gas / LP Gas | 3500                        | 2.5                                             |

\* GPE15ZN and GPE18ZN are not available





Heavy-duty jobs require heavy-duty machinery. Cat lift trucks are built for rugged applications. However, with all that power Cat lift trucks makes sure operator comfort doesn't take a back seat.



## Operator Efficiency And Comfort

A clean, unobstructed work environment enables the operator to perform more efficiently. A generous floor area enhances operator mobility and comfort. The open-step entry with slip-resistant steel plates and an easy-to-reach elongated grab bar help make getting in and out of the cab easy.

## Added Operator Protection

The advanced Cat lift trucks operator Presence Detection System (PDS) helps keep the operator informed about systems onboard. The System also detects when an operator leaves their seat and does the following:

- Disengages the transmission
- Disconnects power from hydraulic lift and tilt functions
- Sounds alarm if the operator has not applied the parking brake



When an operator returns to the normal seated position, the seat belt warning LED lights up on the meter panel as a reminder to fasten the seat belt.

## Quiet & Smooth Transmission

To reduce noise and vibration, the transmission uses helical gears and a full-floating power train that helps isolate the engine and transmission from the frame and operator compartment. In addition, a hydraulic accumulator promotes smooth starts and direction changes, providing better operator efficiency while minimizing jolts and vibrations.




## Full-Suspension Seat & Tilt Steering

It's a fact: Comfort increases productivity. A full-suspension seat allows an operator to move in just about any direction, with forward, back, weight and lumbar adjustments. The supportive design promotes comfort by resisting shock and vibration. A tilt steering feature offers infinite adjustability within a 12-degree range of movement to comfortably accommodate almost any operator. A separate lever moves the column fully forward to provide easy access to the engine compartment. Afterwards, the steering system's memory recall will automatically return the column to the operator's preferred position.



- Vehicle speed display



- Load weight display



(Optional)

## Integrated Digital Monitors

In the cab digital displays are used to provide easier monitoring of systems and controls. The digital panel illuminates when the ignition is switched on allowing speed, \*load weight and system monitors to be checked at a glance.

# RELIABILITY

**Robust engines that run smoothly and quiet. Cat lift trucks include a durable frame, powerful masts with dependable performance and highly efficient fuel system.**

## Prolonging Equipment Life

With advanced on-board diagnostics, it's easier than ever to keep a Cat lift truck operating at its peak performance. An on-board diagnostic system controls critical lift truck functions. And troubleshooting the system is easy using a laptop computer.

## Speed Limiter

*(Optional) Standard on GPE models only*

This feature allows you to customize the maximum travel speed of the truck to meet your application requirements without affecting overall performance. The benefits include reduced risk to pedestrian traffic, lower operating costs, enhanced engine wear protection, as well as reduced risk of damaging loads, racks, trucks and other property.



# NON-STOP PRODUCTIVITY


## Powerful Yet Environmentally Friendly

Cat lift trucks are equipped with powerful fuel-injected gasoline, LP and diesel engines providing the horsepower and torque you need for even the most challenging applications. Our engines are environmentally friendly and meet or exceed EPA requirements. They are also computer regulated to optimize fuel efficiency. If you're looking for exceptional productivity with maximum fuel efficiency, simply engage the Fuel Saver (Soft) Mode. This softens the initial acceleration of the truck and reduces fuel consumption by 14 percent while maintaining 95 percent of the truck's overall productivity.

**Everything on a Cat lift truck is optimized for performance,** including the single-piece, fully cast, drive and steer axles, which protect vital components from damage and contaminants. A unitized frame offers great rigidity for durable performance in tough applications. The drive axle uses a full-floating design to minimize shocks and stresses, easily handling the high loading requirements of the most challenging work environments. A heavy-duty counterweight grill is a standard feature on these trucks.

## Heavy-Duty Mast

Heavy-duty masts are designed and manufactured for lasting, dependable performance. Narrow mast channels and the efficient positioning and routing of chains and hoses help ensure a clear view forward. The truck's low profile counterweight design provides good visibility to the rear, even with an LP tank in place. The overhead guard cross bar has been eliminated through a design that increases cab strength while improving visibility.

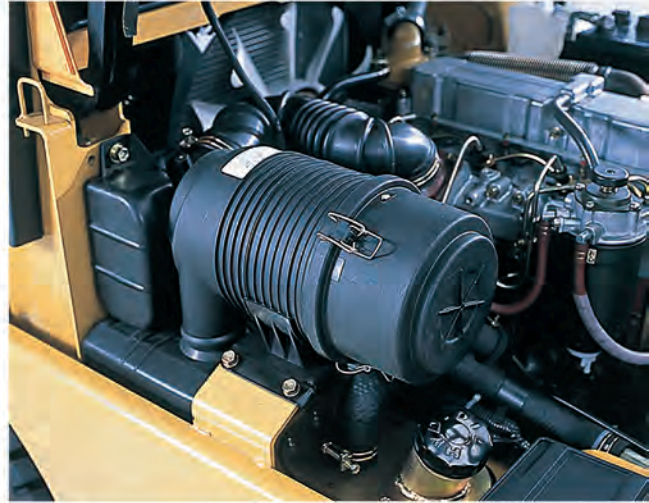



**MORE  
CONFIDENCE**



## Lift Plus Powertrain Warranty *(optional)*

Confidence you can depend on - Cat Lift Trucks are covered by one of the best powertrain warranties in the business. When you choose a Lift Plus warranty for your new Cat lift truck, you're getting long term protection against powertrain failures, which guarantees that if any major powertrain component fails, it will be replaced... it's that simple. And all Lift Plus warranty repair uses only genuine Cat lift truck parts. With Lift Plus warranty, your investment is covered for 3 years or 5000 hours, whichever occurs first. If a powertrain failure causes your lift truck to go down, you're covered.

## Dealers You Can Depend On

Cat lift trucks dealers are unsurpassed, delivering superior customer service that sets us apart from the competition - before, during and after sale.

Our dealers make available leading support programs with every new Cat lift truck you purchase, including:

- Genuine Cat lift truck OEM parts
- Planned Maintenance
- Rental fleet availability
- Convenient dealer branch locations

## Planned Maintenance

Proper maintenance of your truck helps assure top performance over the long haul and helps extend truck longevity. That's why every Cat lift truck is backed by experienced and reliable dealers who make sure your truck is properly maintained. With Cat lift truck planned maintenance, you won't have to worry about scheduling maintenance or unexpected downtime. Regular planned maintenance calls are scheduled in advance to avoid interference with your operating schedules. Experienced Cat lift trucks service technicians will regularly perform all periodic maintenance including fluid and lubricant check for a predetermined rate. We'll even identify and fix potential problems before they become major difficulties.

# Specifications

| CHARACTERISTICS |                                                    |                                      |           |      |   |                     |       |                     |              |                     |              |              |
|-----------------|----------------------------------------------------|--------------------------------------|-----------|------|---|---------------------|-------|---------------------|--------------|---------------------|--------------|--------------|
| 1               | Type of Truck                                      |                                      |           |      |   | DIESEL ENGINE TRUCK |       |                     |              |                     |              |              |
| 2               | Model                                              |                                      |           |      |   | DP15N               | DP18N | DP20CN              | DP20N        | DP25N               | DP30N        | DP35N        |
| 3               | Loading Capacity                                   |                                      |           | kg   |   | 1500                | 1750  | 2000                |              | 2500                | 3000         | 3500         |
| 4               | Load Center                                        |                                      |           | mm   |   | 500                 |       | 500                 |              |                     | 500          |              |
| PERFORMANCE     |                                                    |                                      |           |      |   |                     |       |                     |              |                     |              |              |
| 5               | Maximum Fork Height                                |                                      |           | mm   | A | 3000                |       | 3000                |              |                     | 3000         |              |
| 6               | Free Fork Height                                   |                                      |           | mm   | B | 115                 |       | 120                 | 140          |                     | 145          |              |
| 7               | Speeds                                             | Lifting                              | Loaded    | mm/s |   | 630                 |       | 630                 |              | 500                 |              | 420          |
|                 |                                                    |                                      | Unloaded  | mm/s |   | 690                 |       | 650                 | 660          |                     | 530          | 450          |
|                 |                                                    | Lowering                             | Loaded    | mm/s |   | 520                 |       | 520                 | 500          |                     | 530          | 420          |
|                 |                                                    |                                      | Unloaded  | mm/s |   | 500                 |       | 500                 |              |                     | 500          | 400          |
| 8               | Tilt                                               | Mast                                 | Forward   | deg  |   | 6                   |       | 6                   |              | 6                   |              |              |
|                 |                                                    |                                      | Backward  | deg  |   | 12                  |       | 12                  |              | 12                  |              |              |
| 9               | Speeds                                             | Traveling (Powershift)               | Loaded    | km/h |   | 19                  |       | 19                  |              | 19                  |              |              |
|                 |                                                    |                                      | Unloaded  | km/h |   | 19.5                |       | 19.5                |              | 19.5                |              |              |
|                 |                                                    | Traveling (Manual)                   | Loaded    | km/h |   | 19                  |       | 19                  |              | 19                  |              |              |
|                 |                                                    |                                      | Unloaded  | km/h |   | 19.5                |       | 19.5                |              | 19.5                |              |              |
| 10              | Maximum Drawbar Pull                               | Powershift                           | Loaded    | kgf  |   | 1260                | 1250  | 1210                | 1830         | 1810                | 1770         | 1680         |
|                 |                                                    | Manual                               | Loaded    | kgf  |   | 1180                | 1160  | 1130                | 1500         | 1480                | 1460         | 1380         |
| 11              | Maximum Gradeability                               | Powershift                           | Loaded    | %    |   | 33                  | 29    | 25                  | 36           | 31                  | 25           | 21           |
|                 |                                                    | Manual                               | Loaded    | %    |   | 30                  | 27    | 23                  | 29           | 24                  | 20           | 17           |
| 12              | Turning Radius                                     |                                      |           | mm   | C | 1950                | 1980  | 2020                | 2200         | 2230                | 2380         | 2440         |
| 13              | Practical Intersecting Aisle Width                 |                                      |           | mm   |   | 2065                | 2080  | 2105                | 2195         | 2215                | 2325         | 2365         |
| 14              | Practical Aisle for Right Angle Stacking           |                                      |           | mm   |   | 3650                | 3680  | 3735                | 3955         | 3985                | 4170         | 4230         |
| DIMENSIONS      |                                                    |                                      |           |      |   |                     |       |                     |              |                     |              |              |
| 15              | Overall Length                                     |                                      |           | mm   | D | 3180                | 3220  | 3275                | 3405         | 3480                | 3805         | 3865         |
| 16              | Width                                              | with Standard Tires                  | mm        | E    |   | 1065                |       | 1065                | 1150         |                     | 1275         | 1290         |
|                 |                                                    | with Optional Duals                  | mm        |      |   | 1330                | —     | 1480                |              | 1490                |              |              |
| 17              | Height                                             | with Lowered Mast                    | mm        | F    |   | 1980                |       | 1990                |              | 2015                |              | 2130         |
|                 |                                                    | with Extended Mast (with Backrest)   | mm        | G    |   | 4055                |       | 4055                |              | 4055                |              |              |
|                 |                                                    | to Top of Overhead Guard             | mm        | H    |   | 2065                | 2065  | 2074                |              | 2093                | 2103         |              |
| 18              | Forks (Thickness x Width x Length)                 |                                      |           | mm   | I | 35x100x920          |       | 45x100x920          |              | 45x122x1070         |              |              |
| 19              | Fork Spread (Out-to-Out Minimum / Maximum)         |                                      |           | mm   | J | 200-920             |       | 244-920             | 244-1000     |                     | 244-1000     |              |
| 20              | Front Overhang (Center of Front Axle to Fork Face) |                                      |           | mm   | K | 400                 |       | 415                 | 455          |                     | 490          |              |
| 21              | Wheelbase                                          |                                      |           | mm   | L | 1400                |       | 1400                | 1600         |                     | 1700         |              |
| 22              | Tread Width                                        | Front, standard tires                | mm        | M    |   | 890                 |       | 890                 | 960          |                     | 1060         |              |
|                 |                                                    | Front, optional duals                | mm        |      |   | 1025                | —     | 1140                |              | 1140                |              |              |
|                 |                                                    | Rear tires                           | mm        | N    |   | 900                 | 900   | 980                 |              | 980                 |              |              |
| 23              | Ground Clearance                                   | at Lowest point outer mast           | mm        |      |   | 110                 | 110   | 115                 |              | 135                 | 150          |              |
|                 |                                                    | at Center of Wheelbase               | mm        |      |   | 150                 | 150   | 160                 |              | 190                 | 200          |              |
| 24              | Tire Size                                          | Size Front, standard                 |           |      |   | 6.50-10-10-PR       |       | 6.50-10/5.00        | 7.00-12-12PR |                     | 28x9-15-12PR | 250-15-16PR  |
|                 |                                                    | Size Front, optional dual            |           |      |   | 4.50-12-8-PR        |       | —                   | 5.50-15-8PR  |                     | 6.00-15-10PR |              |
|                 |                                                    | Size Rear                            |           |      |   | 5.00-8-8-PR         |       | 5.00-8/3.00         | 6.00-9-10PR  |                     | 6.50-10-10PR | 6.50-10-12PR |
| WEIGHT          |                                                    |                                      |           |      |   |                     |       |                     |              |                     |              |              |
| 25              | Machine Weight                                     | Powershift (standard)                | kg        |      |   | 2550                | 2740  | 3060                | 3410         | 3710                | 4350         | 4740         |
|                 |                                                    | Manual (standard)                    | kg        |      |   | 2590                | 2780  | 3100                | 3450         | 3750                | 4390         | 4780         |
|                 |                                                    | Powershift (optional dual)           | kg        |      |   | 2590                | 2780  | —                   | 3500         | 3800                | 4390         | 4770         |
|                 |                                                    | Manual (optional dual)               | kg        |      |   | 2630                | 2820  | —                   | 3540         | 3840                | 4430         | 4810         |
| BRAKE           |                                                    |                                      |           |      |   |                     |       |                     |              |                     |              |              |
| 26              | Service Brake                                      |                                      |           |      |   | Hyd.                |       | Hyd.                |              | Hyd.                |              |              |
| 27              | Parking Brake                                      |                                      |           |      |   | Hand                |       | Hand                |              | Hand                |              |              |
| POWERTRAIN      |                                                    |                                      |           |      |   |                     |       |                     |              |                     |              |              |
| 28              | Engine                                             | Model                                |           |      |   | S402                |       | S402                | S4S          |                     | S4S          |              |
|                 |                                                    | Max. Rated Power / rpm to DIN 70020  | Kw / rpm  |      |   | 30 / 2500           |       | 30 / 2500           | 38.1 / 2250  |                     | 38.1 / 2250  |              |
|                 |                                                    |                                      | ps / rpm  |      |   | 40.8 / 2500         |       | 40.8 / 2500         | 51.8 / 2250  |                     | 51.8 / 2250  |              |
|                 |                                                    | Max. Rated Torque / rpm to DIN 70020 | Nm / rpm  |      |   | 131 / 1800          |       | 131 / 1800          | 185 / 1700   |                     | 185 / 1700   |              |
|                 |                                                    |                                      | kgm / rpm |      |   | 13.4 / 1800         |       | 13.4 / 1800         | 18.9 / 1700  |                     | 18.9 / 1700  |              |
|                 |                                                    | Displacement                         | cc        |      |   | 2505                |       | 2505                | 3331         |                     | 3331         |              |
| 29              | Transmission                                       | Fuel Tank Capacity                   | l         |      |   | 46                  |       | 46                  | 66           |                     | 66           |              |
|                 |                                                    | Type                                 |           |      |   | Powershift / Manual |       | Powershift / Manual |              | Powershift / Manual |              |              |
|                 |                                                    | Number of Speeds                     |           |      |   | AT:1 / MT:2         |       | AT:1 / MT:2         |              | AT:1 / MT:2         |              |              |
| 30              | Relief Pressure                                    | For Attachments                      | Mpa       |      |   | 18.1                |       | 18.1                |              | 18.1                |              |              |


GASOLINE ENGINE TRUCK

| GP15N               | GP15ZN      | GP18N       | GP18ZN      | GP20CN              | GP20N       | GP20ZN       | GP25N       | GP25ZN      | GP30N               | GP35N        |
|---------------------|-------------|-------------|-------------|---------------------|-------------|--------------|-------------|-------------|---------------------|--------------|
| 1500                |             | 1750        |             | 2000                |             |              | 2500        |             | 3000                | 3500         |
| 500                 |             |             |             | 500                 |             |              |             |             | 500                 |              |
| 3000                |             |             |             | 3000                |             |              |             |             | 3000                |              |
| 115                 |             |             |             | 120                 | 140         |              | 145         |             | 145                 |              |
| 490                 | 570         | 490         | 570         | 570                 | 520         | 580          | 520         | 580         | 480                 | 390          |
| 560                 | 650         | 560         | 650         | 650                 | 600         | 660          | 600         | 660         | 530                 | 450          |
| 520                 |             |             |             | 520                 |             | 500          |             |             | 530                 | 420          |
| 500                 |             |             |             |                     |             | 500          |             |             | 500                 | 400          |
| 6                   |             |             |             |                     |             | 6            |             |             | 6                   |              |
| 12                  |             |             |             |                     |             | 12           |             |             | 12                  |              |
| 19                  |             |             |             |                     |             | 19           |             |             | 19                  |              |
| 19.5                |             |             |             |                     |             | 19.5         |             |             | 19.5                |              |
| 19                  |             |             |             |                     |             | 19           |             |             | 19                  |              |
| 19.5                |             |             |             |                     |             | 19.5         |             |             | 19.5                |              |
| 1110                | 1530        | 1090        | 1520        | 1480                | 1520        | 1750         | 1500        | 1730        | 1710                | 1630         |
| 960                 | 1280        | 950         | 1270        | 1230                | 1280        | 1620         | 1250        | 1590        | 1590                | 1500         |
| 29                  | 41          | 25          | 36          | 31                  | 30          | 35           | 25          | 30          | 24                  | 20           |
| 24                  | 33          | 22          | 29          | 25                  | 25          | 32           | 21          | 27          | 22                  | 19           |
| 1950                |             | 1980        |             | 2020                |             | 2200         |             | 2230        | 2380                | 2440         |
| 2065                |             | 2080        |             | 2105                |             | 2195         |             | 2215        | 2325                | 2365         |
| 3650                |             | 3680        |             | 3735                |             | 3955         |             | 3985        | 4170                | 4230         |
| 3180                |             | 3220        |             | 3275                |             | 3405         |             | 3480        | 3805                | 3865         |
| 1065                |             |             |             | 1065                |             | 1150         |             |             | 1275                | 1290         |
| 1330                |             |             |             | —                   |             | 1480         |             |             | 1490                |              |
| 1990                |             |             |             |                     |             | 1990         |             |             | 2015                | 2130         |
| 4055                |             |             |             |                     |             | 4055         |             |             | 4055                |              |
| 2065                |             |             |             | 2065                |             | 2074         |             |             | 2093                | 2103         |
| 35x100x920          |             |             |             |                     |             | 45x100x920   |             |             | 45x122x1070         |              |
| 200-920             |             |             |             | 220-920             |             | 220-1000     |             |             | 250-1000            |              |
| 400                 |             |             |             | 415                 |             | 455          |             | 460         | 495                 |              |
| 1400                |             |             |             | 1400                |             | 1600         |             |             | 1700                |              |
| 890                 |             |             |             | 890                 |             | 960          |             |             | 1060                |              |
| 1025                |             |             |             | —                   |             | 1140         |             |             | 1140                |              |
| 900                 |             |             |             | —                   |             | 980          |             |             | 980                 |              |
| 110                 |             |             |             | 110                 |             | 115          |             |             | 135                 | 150          |
| 150                 |             |             |             | 150                 |             | 160          |             |             | 190                 | 200          |
| 6.50-10-10-PR       |             |             |             | 6.50-10/5.00        |             | 7.00-12-12PR |             |             | 28x9-15-12PR        | 250-15-16PR  |
| 4.50-12-8-PR        |             |             |             | —                   |             | 5.50-15-8PR  |             |             | 6.00-15-10PR        |              |
| 5.00-8-8-PR         |             |             |             | 5.00-8/3.00         |             | 6.00-9-10PR  |             |             | 6.50-10-10PR        | 6.50-10-12PR |
| 2490                |             | 2690        |             | 3010                | 3300        |              | 3600        |             | 4240                | 4630         |
| 2530                |             | 2730        |             | 3050                | 3340        |              | 3640        |             | 4280                | 4670         |
| 2530                |             | 2730        |             | —                   | 3390        |              | 3690        |             | 4290                | 4660         |
| 2570                |             | 2770        |             | —                   | 3430        |              | 3730        |             | 4320                | 4700         |
| Hyd                 |             |             |             | Hyd                 |             |              |             |             | Hyd                 |              |
| Hand                |             |             |             | Hand                |             |              |             |             | Hand                |              |
| GK15                | GK21        | GK15        | GK21        | GK21                | GK25        | GK21         | GK25        | GK25        | GK25                |              |
| 26 / 2450           | 34 / 2200   | 26 / 2450   | 34 / 2200   | 34 / 2200           | 40 / 2200   | 34 / 2200    | 40 / 2200   | 40 / 2200   | 40 / 2200           |              |
| 35.4 / 2450         | 46.2 / 2200 | 35.4 / 2450 | 46.2 / 2200 | 46.2 / 2200         | 54.4 / 2200 | 46.2 / 2200  | 54.4 / 2200 | 54.4 / 2200 | 54.4 / 2200         |              |
| 109 / 2000          | 158 / 1600  | 109 / 2000  | 158 / 1600  | 158 / 1600          | 186 / 1600  | 158 / 1600   | 186 / 1600  | 186 / 1600  | 186 / 1600          |              |
| 11.1 / 2000         | 16.1 / 1600 | 11.1 / 2000 | 16.1 / 1600 | 16.1 / 1600         | 19.0 / 1600 | 16.1 / 1600  | 19.0 / 1600 | 19.0 / 1600 | 19.0 / 1600         |              |
| 1486                | 2065        | 1486        | 2065        | 2065                | 2488        | 2065         | 2488        | 2488        | 2488                |              |
| 46                  |             |             |             | 46                  |             | 66           |             |             | 66                  |              |
| Powershift / Manual |             |             |             | Powershift / Manual |             |              |             |             | Powershift / Manual |              |
| AT:1 / MT:2         |             |             |             | AT:1 / MT:2         |             |              |             |             | AT:1 / MT:2         |              |
| 18.1                |             |             |             | 18.1                |             |              |             |             | 18.1                |              |

## ELECTRONICALLY CONTROLLED GASOLINE ENGINE TRUCK

| ELECTRONICALLY CONTROLLED GASOLINE ENGINE TRUCK |               |        |  |                                      |  |        |  |                                      |      |              |        |                                      |  |         |      |                                      |        |      |              |                                      |      |      |  |
|-------------------------------------------------|---------------|--------|--|--------------------------------------|--|--------|--|--------------------------------------|------|--------------|--------|--------------------------------------|--|---------|------|--------------------------------------|--------|------|--------------|--------------------------------------|------|------|--|
| GPE15N                                          |               | GPE18N |  | GPE20CN                              |  | GPE20N |  | GPE20ZN                              |      |              | GPE25N |                                      |  | GPE25ZN |      |                                      | GPE30N |      | GPE35N       |                                      |      |      |  |
| 1500                                            |               | 1750   |  |                                      |  |        |  | 2000                                 |      |              |        |                                      |  | 2500    |      |                                      |        |      | 3000         |                                      | 3500 |      |  |
| 500                                             |               |        |  |                                      |  |        |  | 500                                  |      |              |        |                                      |  |         |      | 500                                  |        |      |              |                                      |      |      |  |
|                                                 |               |        |  |                                      |  |        |  |                                      |      |              |        |                                      |  |         |      |                                      |        |      |              |                                      |      |      |  |
| 3000                                            |               |        |  |                                      |  |        |  | 3000                                 |      |              |        |                                      |  |         |      | 3000                                 |        |      |              |                                      |      |      |  |
| 115                                             |               |        |  | 120                                  |  |        |  |                                      |      |              |        | 140                                  |  |         |      |                                      |        |      |              | 145                                  |      |      |  |
| 630                                             |               |        |  | 630                                  |  |        |  | 580                                  |      | 640          |        | 580                                  |  | 640     |      | 510                                  |        | 430  |              |                                      |      |      |  |
| 650                                             |               |        |  | 650                                  |  |        |  | 590                                  |      | 650          |        | 590                                  |  | 660     |      | 530                                  |        | 440  |              |                                      |      |      |  |
| 520                                             |               |        |  | 520                                  |  |        |  |                                      |      |              |        | 500                                  |  |         |      | 530                                  |        |      |              | 420                                  |      |      |  |
| 500                                             |               |        |  |                                      |  |        |  |                                      |      |              |        | 500                                  |  |         |      | 500                                  |        |      |              | 400                                  |      |      |  |
| 6                                               |               |        |  |                                      |  |        |  |                                      |      |              |        | 6                                    |  |         |      |                                      |        |      |              | 6                                    |      |      |  |
| 12                                              |               |        |  |                                      |  |        |  |                                      |      |              |        | 12                                   |  |         |      |                                      |        |      |              | 12                                   |      |      |  |
| 19                                              |               |        |  |                                      |  |        |  |                                      |      |              |        | 19                                   |  |         |      |                                      |        |      |              | 19                                   |      |      |  |
| 19.5                                            |               |        |  |                                      |  |        |  |                                      |      |              |        | 19.5                                 |  |         |      |                                      |        |      |              | 19.5                                 |      |      |  |
| 19                                              |               |        |  |                                      |  |        |  |                                      |      |              |        | 19                                   |  |         |      |                                      |        |      |              | 19                                   |      |      |  |
| 19.5                                            |               |        |  |                                      |  |        |  |                                      |      |              |        | 19.5                                 |  |         |      |                                      |        |      |              | 19.5                                 |      |      |  |
| 1710                                            |               |        |  | 1670                                 |  | 1690   |  | 1860                                 |      |              | 1690   |                                      |  | 1870    |      |                                      | 1860   |      | 1750         |                                      |      |      |  |
| 1390                                            |               | 1380   |  | 1360                                 |  | 1390   |  | 1630                                 |      |              | 1380   |                                      |  | 1620    |      |                                      | 1680   |      | 1560         |                                      |      |      |  |
| 48                                              |               | 42     |  | 36                                   |  | 34     |  | 38                                   |      |              | 29     |                                      |  | 33      |      |                                      | 27     |      | 22           |                                      |      |      |  |
| 38                                              |               | 34     |  | 29                                   |  | 28     |  | 33                                   |      |              | 24     |                                      |  | 28      |      |                                      | 24     |      | 20           |                                      |      |      |  |
| 1950                                            |               | 1980   |  | 2020                                 |  |        |  |                                      | 2200 |              |        |                                      |  |         | 2230 |                                      |        | 2380 |              | 2440                                 |      |      |  |
| 2065                                            |               | 2080   |  | 2105                                 |  |        |  |                                      | 2195 |              |        |                                      |  |         | 2215 |                                      |        | 2325 |              | 2365                                 |      |      |  |
| 3650                                            |               | 3680   |  | 3735                                 |  |        |  |                                      | 3955 |              |        |                                      |  |         | 3985 |                                      |        | 4170 |              | 4230                                 |      |      |  |
|                                                 |               |        |  |                                      |  |        |  |                                      |      |              |        |                                      |  |         |      |                                      |        |      |              |                                      |      |      |  |
| 3180                                            |               | 3220   |  | 3275                                 |  |        |  |                                      | 3405 |              |        |                                      |  |         | 3480 |                                      |        | 3805 |              | 3865                                 |      |      |  |
| 1065                                            |               |        |  | 1065                                 |  |        |  |                                      |      |              |        | 1150                                 |  |         |      |                                      |        |      |              | 1275                                 |      | 1290 |  |
| 1330                                            |               |        |  | —                                    |  |        |  |                                      |      |              |        | 1480                                 |  |         |      |                                      |        |      |              | 1490                                 |      | 1490 |  |
| 1980                                            |               |        |  |                                      |  |        |  |                                      |      |              |        | 1990                                 |  |         |      |                                      |        |      |              | 2015                                 |      | 2130 |  |
| 4055                                            |               |        |  |                                      |  |        |  |                                      |      |              |        | 4055                                 |  |         |      |                                      |        |      |              | 4055                                 |      |      |  |
| 2065                                            |               |        |  | 2065                                 |  |        |  |                                      |      |              |        | 2074                                 |  |         |      |                                      |        |      |              | 2093                                 |      | 2103 |  |
| 35x100x920                                      |               |        |  |                                      |  |        |  |                                      |      |              |        | 45x100x920                           |  |         |      |                                      |        |      |              | 45x122x1070                          |      |      |  |
| 200-920                                         |               |        |  | 244-920                              |  |        |  |                                      |      |              |        | 244-1000                             |  |         |      |                                      |        |      |              | 244-1000                             |      |      |  |
| 400                                             |               |        |  | 415                                  |  |        |  |                                      |      |              |        | 455                                  |  |         |      |                                      |        |      |              | 490                                  |      |      |  |
| 1400                                            |               |        |  | 1400                                 |  |        |  |                                      |      |              |        | 1600                                 |  |         |      |                                      |        |      |              | 1700                                 |      |      |  |
| 890                                             |               |        |  | 890                                  |  |        |  |                                      |      |              |        | 960                                  |  |         |      |                                      |        |      |              | 1060                                 |      |      |  |
| 1025                                            |               |        |  | —                                    |  |        |  |                                      |      |              |        | 1140                                 |  |         |      |                                      |        |      |              | 1140                                 |      |      |  |
| 900                                             |               |        |  | 900                                  |  |        |  |                                      |      |              |        | 980                                  |  |         |      |                                      |        |      |              | 980                                  |      |      |  |
| 110                                             |               |        |  | 110                                  |  |        |  |                                      |      |              |        | 115                                  |  |         |      |                                      |        |      |              | 135                                  |      | 150  |  |
| 150                                             |               |        |  | 150                                  |  |        |  |                                      |      |              |        | 160                                  |  |         |      |                                      |        |      |              | 190                                  |      | 200  |  |
| R                                               | 6.50-10-10-PR |        |  | 6.50-10 / 5.00                       |  |        |  |                                      |      | 7.00-12-12PR |        |                                      |  |         |      | 28x9-15-12PR                         |        |      | 250-15-16PR  |                                      |      |      |  |
|                                                 | 4.50-12-8-PR  |        |  | —                                    |  |        |  |                                      |      | 5.50-15-8PR  |        |                                      |  |         |      | 6.00-15-10PR                         |        |      |              |                                      |      |      |  |
| R                                               | 5.00-8-8-PR   |        |  | 5.00-8 / 3.00                        |  |        |  |                                      |      | 6.00-9-10PR  |        |                                      |  |         |      | 6.50-10-10PR                         |        |      | 6.50-10-12PR |                                      |      |      |  |
|                                                 |               |        |  |                                      |  |        |  |                                      |      |              |        |                                      |  |         |      |                                      |        |      |              |                                      |      |      |  |
| 2490                                            |               | 2690   |  | 3010                                 |  |        |  |                                      | 3300 |              |        |                                      |  |         | 3600 |                                      |        | 4240 |              | 4630                                 |      |      |  |
| 2530                                            |               | 2730   |  | 3050                                 |  |        |  |                                      | 3340 |              |        |                                      |  |         | 3640 |                                      |        | 4280 |              | 4670                                 |      |      |  |
| 2530                                            |               | 2730   |  | —                                    |  |        |  |                                      | 3390 |              |        |                                      |  |         | 3690 |                                      |        | 4280 |              | 4660                                 |      |      |  |
| 2570                                            |               | 2770   |  | —                                    |  |        |  |                                      | 3430 |              |        |                                      |  |         | 3730 |                                      |        | 4320 |              | 4700                                 |      |      |  |
|                                                 |               |        |  |                                      |  |        |  |                                      |      |              |        |                                      |  |         |      |                                      |        |      |              |                                      |      |      |  |
| Hyd.                                            |               |        |  |                                      |  |        |  | Hyd.                                 |      |              |        |                                      |  |         |      | Hyd.                                 |        |      |              |                                      |      |      |  |
| Hand                                            |               |        |  |                                      |  |        |  | Hand                                 |      |              |        |                                      |  |         |      | Hand                                 |        |      |              |                                      |      |      |  |
|                                                 |               |        |  |                                      |  |        |  |                                      |      |              |        |                                      |  |         |      |                                      |        |      |              |                                      |      |      |  |
| GK21E                                           |               |        |  | GK21E                                |  |        |  | GK25E                                |      |              |        | GK21E                                |  |         |      | GK25E                                |        |      |              | GK25E                                |      |      |  |
| (GAS) 36.8 / 2700, (LPG) 37.5 / 2700            |               |        |  | (GAS) 36.8 / 2700, (LPG) 37.5 / 2700 |  |        |  | (GAS) 43.1 / 2700, (LPG) 43.8 / 2700 |      |              |        | (GAS) 36.8 / 2700, (LPG) 37.5 / 2700 |  |         |      | (GAS) 43.1 / 2700, (LPG) 43.8 / 2700 |        |      |              | (GAS) 43.1 / 2700, (LPG) 43.8 / 2700 |      |      |  |
| (GAS) 50.0 / 2700, (LPG) 51.0 / 2700            |               |        |  | (GAS) 50.0 / 2700, (LPG) 51.0 / 2700 |  |        |  | (GAS) 58.6 / 2700, (LPG) 59.6 / 2700 |      |              |        | (GAS) 50.0 / 2700, (LPG) 51.0 / 2700 |  |         |      | (GAS) 58.6 / 2700, (LPG) 59.6 / 2700 |        |      |              | (GAS) 58.6 / 2700, (LPG) 59.6 / 2700 |      |      |  |
| (GAS) 145 / 1800, (LPG) 151 / 1800              |               |        |  | (GAS) 145 / 1800, (LPG) 151 / 1800   |  |        |  | (GAS) 167 / 1800, (LPG) 186 / 1600   |      |              |        | (GAS) 145 / 1800, (LPG) 151 / 1800   |  |         |      | (GAS) 167 / 1800, (LPG) 186 / 1600   |        |      |              | (GAS) 167 / 1800, (LPG) 186 / 1600   |      |      |  |
| (GAS) 14.8 / 1800, (LPG) 15.4 / 1800            |               |        |  | (GAS) 14.8 / 1800, (LPG) 15.4 / 1800 |  |        |  | (GAS) 17.0 / 1800, (LPG) 19.0 / 1600 |      |              |        | (GAS) 14.8 / 1800, (LPG) 15.4 / 1800 |  |         |      | (GAS) 17.0 / 1800, (LPG) 19.0 / 1600 |        |      |              | (GAS) 17.0 / 1800, (LPG) 19.0 / 1600 |      |      |  |
| 2065                                            |               |        |  | 2065                                 |  |        |  | 2488                                 |      |              |        | 2065                                 |  |         |      | 2488                                 |        |      |              | 2488                                 |      |      |  |
| 46                                              |               |        |  | 46                                   |  |        |  |                                      |      |              |        | 66                                   |  |         |      |                                      |        |      |              | 66                                   |      |      |  |
| Powershift / Manual                             |               |        |  |                                      |  |        |  | Powershift / Manual                  |      |              |        |                                      |  |         |      | Powershift / Manual                  |        |      |              |                                      |      |      |  |
| AT:1 / MT:2                                     |               |        |  |                                      |  |        |  | AT:1 / MT:2                          |      |              |        |                                      |  |         |      | AT:1 / MT:2                          |        |      |              |                                      |      |      |  |
| 18.1                                            |               |        |  |                                      |  |        |  | 18.1                                 |      |              |        |                                      |  |         |      | 18.1                                 |        |      |              |                                      |      |      |  |

Call-out reference shown in the diagram correspond to the fourth column of the specifications chart.

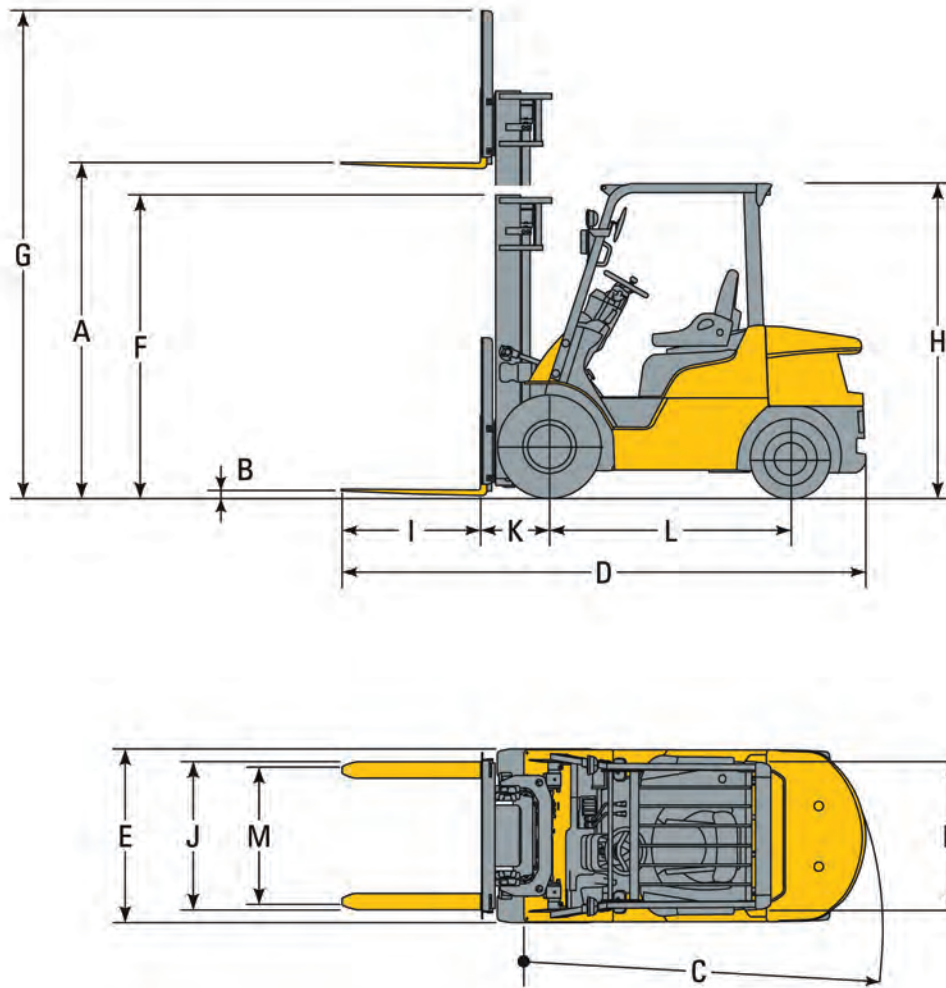

## Optional Attachments

|   |                     |   |                 |   |                 |                                                                                                              |               |
|---|---------------------|---|-----------------|---|-----------------|--------------------------------------------------------------------------------------------------------------|---------------|
| 1 | Side shifter        | 2 | Hinged fork     | 3 | Fork positioner | 4                                                                                                            | Rotating fork |
|   |                     |   |                 |   |                 |                                                                                                              |               |
| 5 | Rotating roll clamp | 6 | Load stabilizer | 7 | Bale clamp      | 8                                                                                                            | Others:       |
|   |                     |   |                 |   |                 | Attachments meeting your specific requirements are available. Please feel free to contact your local dealer. |               |



Cat Lift Truck offers a complete range of durable lift trucks, from gasoline, LPG, diesel-powered and electric counterbalance lift trucks to warehouse equipment designed to handle your toughest applications. We know you demand uncompromising quality from lift trucks that maximize uptime and get the job done efficiently. Our rugged machines deliver day after day by providing you with all the life-cycle cost of ownership benefits you've come to expect from Cat lift trucks.

**LET'S DO THE WORK.™**



**TOTAL MACHINE  
SATISFACTION.**

© 2021 by Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

FCAT0166-01(02/2021) Printed in Singapore



**CAT**  
Lift Trucks